

CONFORMITY TO TYPE BASED ON INTERNAL PRODUCTON CONTROL PLUS SUPERVISED PRODUCT CHECK AT RANDOM INTERVALS

(MODULE C2, ANNEX VII) (92-20-03-01-R01)

Report No : 92-20-03-01-R01

Report Date : 18.01.2021

Application No : 92-20-03-01-R01

1. COMPANY INFORMATION:

FAGO MEDİKAL SAN. VE TİC. LTD. ŞTİ.

15 Temmuz Mah. Cami Yolu Cad. No:106 / Z1 Bağcılar/İSTANBUL

Tel: +90212 630 67 55 -56

E-mail: info@fagomedikal.com, birsen@fagomedikal.com


2. PPE INFORMATION:

Disposable and non-sterile half mask made of particulate protection fitler material.

3. PPE TYPE IDENTIFICATION

EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles -Requirements, testing, marking

4. PPE PICTURES

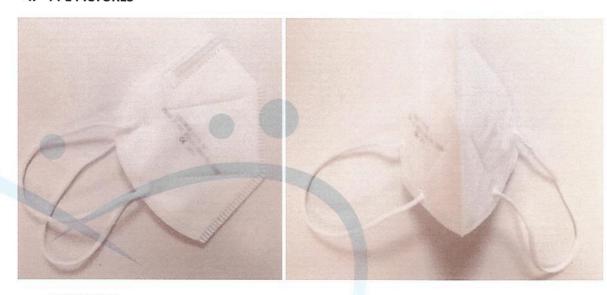

FAGO S 101

5. PPE DIMENSIONS:

FAGO S 101 model has been found to be produced using standard sizes.

6. PPE PRODUCT MATERIAL INFORMATION:

The mask is made of elastic strap, nonwoven fabric on the outer and inner layers and fitler material on the middle layer.



CONFORMITY TO TYPE BASED ON INTERNAL PRODUCTON CONTROL PLUS SUPERVISED PRODUCT CHECK AT RANDOM INTERVALS

(MODULE C2, ANNEX VII) (92-20-03-01-R01)

7. ESSENTIAL HEALTH AND SAFETY REQUIREMENTS

- A visual inspection was made according to EN 149:2001 +A1:2009 for ergonomics.
- Protection levels and degrees are defined by the manufacturer.
- Suitable construction materials were determined by visual inspection according to EN 149:2001 +A1:2009.
- Respiratory protective dimensions are evaluated according to EN 149:2001 +A1:2009.
- Conditioning EN 149:2001 +A1:2009 part 8.3, Penetration EN 149:2001 +A1:2009 part 8.11 (EN 13274-7), Application performance EN 149:2001 +A1:2009 part 8.4, Inward leakage EN 149:2001 +A1:2009 part 8.5, Flammability EN 149:2001 +A1:2009 part 8.6, The carbon dioxide content of the inhaled air EN 149:2001 +A1:2009 part 8.7, Inhalation resistance EN 149:2001 +A1:2009 part 8.9, Exhalation resistance EN 149:2001 +A1:2009 part 8.9 has been tested and evaluated.

8. ANALYSIS AND EVALUATIONS:

EN 149:2001 +A1:2009

TESTS	PARAMETER	PERFC LEVEL	RMANO S	Œ	RESULTS	PERFORMANCE LEVELS	EVALUATION
		FFP1	FFP2	FFP3			
Visual inspection	Shall also the markin supplied by the manu	33		mation	Appropriate	-	PASS
Total inward leakage	At least 46 out of the 50 individual exercise result	<25	<11	<5	See the table below	FFP2	PASS
	At least 8 out of the 10 individual wearer arithmetic means	<22	<8	<2	See the table below	FFP2	PASS

Total Inward Leakage (%)										
	Exercise 1	Exercise 2	Exercise 3	Exercise 4	Exercise 5	Average				
Subject 1 (As recieved)	4.9	5.2	5.1	5.7	5.0	5.2				
Subject 2 (As recieved)	5.7	5.6	5.0	5.1	5.8	5.4				
Subject 3 (As recieved)	5.2	5.6	5.2	5.2	5.2	5.3				
Subject 4 (As recieved)	5.1	5.2	5.1	5.7	5.8	5.4				
Subject 5 (As recieved)	5.7	5.0	5.2	5.3	5.2	5.3				
Subject 6 (After temperature conditioning)	5.2	5.2	5.1	5.7	5.1	5.3				
Subject 7 (After temperature conditioning)	5.8	5.3	5.4	6.3	6.5	5.9				
Subject 8 (After temperature conditioning)	5.8	5.5	5.8	5.0	5.0	5.4				
Subject 9 (After temperature conditioning)	5.2	5.1	5.2	4.9	5.2	5.1				
Subject 10 (After temperature conditioning)	5.3	5.2	5.0	5.1	5.1	5.1				



CONFORMITY TO TYPE BASED ON INTERNAL PRODUCTON CONTROL PLUS SUPERVISED PRODUCT

CHECK AT RANDOM INTERVALS

(MODULE C2, ANNEX VII) (92-20-03-01-R01)

TESTS	PARAMETER	PERFO LEVELS	RMANO S	CE	RESULTS	PERFORMANCE LEVELS	EVALUATION
		FFP1	FFP2	FFP3		And the state of t	
Flammibility	Mask shall not burn burn for more than 5	-		Flame not seen	-	PASS	
Carbondioxide content of the inhalation air	Shall not exceed an av	n average of % 1			0.77 0.73 0.76	-	PASS
Penetration of filter material	Sodium chloride, 95 L/min %, max	% 20	% 6	%1	See the table below	FFP2	PASS
	Paraffin oil, 95 L/min % 20 % 6 % 1 %, max				See the table below	FFP2	PASS

Penetration of filter material	Sodium Chloride (%)	Paraffin Oil (%)	
As recieved	3.2	3.3	
As recieved	3.3	3.1	
As recieved	3.1	3.2	
After the simulated wearing treatment	3.6	2.7	
After the simulated wearing treatment	3.8	3.4	
After the simulated wearing treatment	3.8	3.5	
Mechanical strength and temperature conditioning	3.4	3.6	
Mechanical strength and temperature conditioning	3.5	3.1	
Mechanical strength and temperature conditioning	3.4	3.6	

TESTS	PARAMETER PERFORMANCE LEVELS			RESULTS	PERFORMANCE LEVELS	EVALUATION	
		FFP1	FFP2	FFP3			
Compatibility with skin	A service of the proportion of the control of the c	e known to be likely to A y other adverse effect		Appropriate	_	PASS	
Head harness	It can be donned and	removed easily			Appropriate	-	PASS
Breathing Resistance	Inhalation 30L/min	0,6 mbar	0,7 mbar	1 mbar	See the table below	FFP2	PASS
	Inhalation 95L/min	2,1 mbar	2,4 mbar	3 mbar	See the table below	FFP2	PASS
	Exhalation 160L/min 3 3 3 mbar mbar mbar				See the table below	FFP2	PASS

Breathing Resistance (mbar)	Inhalation 30L/min	Inhalation 95L/min	
As recieved	0.3	1.7	
As recieved	0.3	1.7	
As recieved	0.4	1.7	



CONFORMITY TO TYPE BASED ON INTERNAL PRODUCTON CONTROL PLUS SUPERVISED PRODUCT

CHECK AT RANDOM INTERVALS

Notified Body Number: 2841

(MODULE C2, ANNEX VII) (92-20-03-01-R01)

	1.8
0.3	1.8
0.4	1.8
0.3	1.0
	1.7
0.4	1.8
0.4	1.8
	0.3 0.4

Breathing Resistance 160L/min (mbar)	Facing directly ahead	Facing vertically upwards	Facing vertically downwards	Lying on the left side	Lying on the right side
As recieved	2,0	2,0	2,0	2,0	2,0
As recieved	1,9	1,9	2,0	2,0	
As recieved	1,9	2,0	1,9		2,0
After temperature conditioning	2,0			2,0	2,0
After temperature conditioning		2,0	2,0	1,9	1,9
After temperature conditioning	1,9	1,9	1,9	1,9	2,0
After temperature conditioning	1,9	2,0	2,0	2,0	2,0
After the simulated wearing treatment	2,0	2,0	1,9	1,9	
After the simulated wearing treatment	1,9	1,9		0. 7500	2,0
After the simulated wearing treatment	1,9		1,9	2,0	1,9
and amaraca wearing treatment	1,9	2,0	2,0	2,0	2,0

9. DECISION PROPOSAL

Analysis and examinations FAGO S 101 model coded personal protective equipment; Respiratory Protective Devices EN 149:2001 +A1:2009- Filtered Half Masks for Protection Against Particles - Properties, Experiments and Marking standards are evaluated. The homogeneity of the production was monitored at the performance levels determined as a result of the technical evaluations made within the scope of MODULE C2.

10. ATTACHMENTS

- Basic Health Safety Requirements
- Risk Assessment
- Test Reports
- User Instruction

Reason for revision

: The company information has been revised.

CONTROLLER

: VOLKAN AKIN

SING

DATE

: 18.01.2021